


# AZ 900 Webbing sling

EN 354, EN 566, EN 795/B

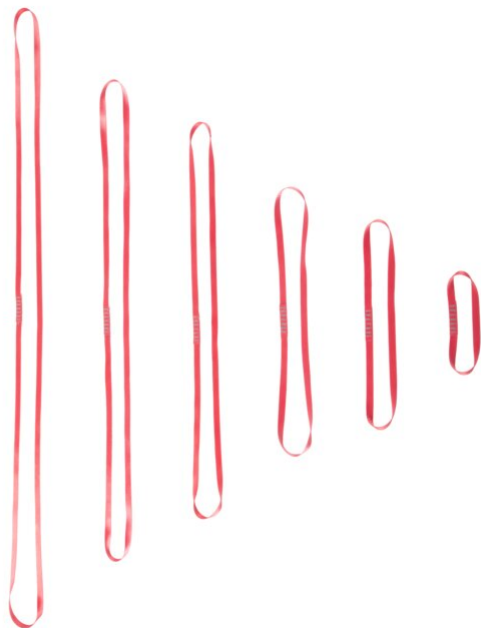

The AZ 900 webbing sling comprises:

- an EN795 coupling element – wrap the sling around the element of a fixed structure, fasten the ends of the webbing sling with an oval latch. Attach a connecting-cushioning component to the oval latch.
- an EN354 safety cable – one of the webbing sling latches should be attached to the fixed structure point / cable hitch / scissor hitch. Connect the other end of the hitch to the safety shock absorber by means of a second latch / by moving one end of the hitch through the other. The resulting connecting and cushioning component is connected directly to the front or rear buckle of the safety harness.

- EN566 mountaineering equipment.

## SPECIAL FEATURES



Protection for 1 person



Suitable for explosion-hazard zones

## PARAMETERS

Tape	polyester	Tape width	21 mm
Threads	polyester	Grubość taśmy	3 mm
Max. number of users	1		
Static strength	22 kN		