

ANCHORAGE DISCORIG

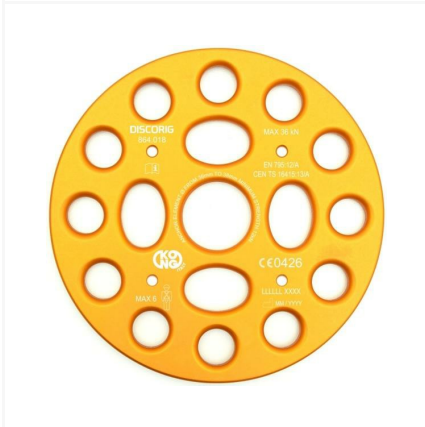


Plate for multiple connections, allows simultaneous connection up to 6 users.

It is an anchor device with multiple attachment points that can be connected to the structures through the central hole (diameter from 36 to 38mm).

It can be used with the Kong model 4D pole.

"Textile Friendly" chamfered holes for direct connections with textile devices.

Certified according to the standards EN 795:2012/A and CEN/TS16415:2013/A, and to the RfU CNB/P/11.114.

Usage activities

SCAFFOLDING AND TRESTELS

ROOF AND INCLINED PLANES

METAL STRUCTURES

ROPE ACCESS

ITEM CODES

Item	Standards	Material	▲ (g)	◆ (kN)	Size	Colour	A (mm)	Hole diameter (mm)
864O18400KK	EN 795/A CEN TS 16415 RfU CNB/P/11.114	Alu alloy	390	36	/	Orange	Ø 187	/